



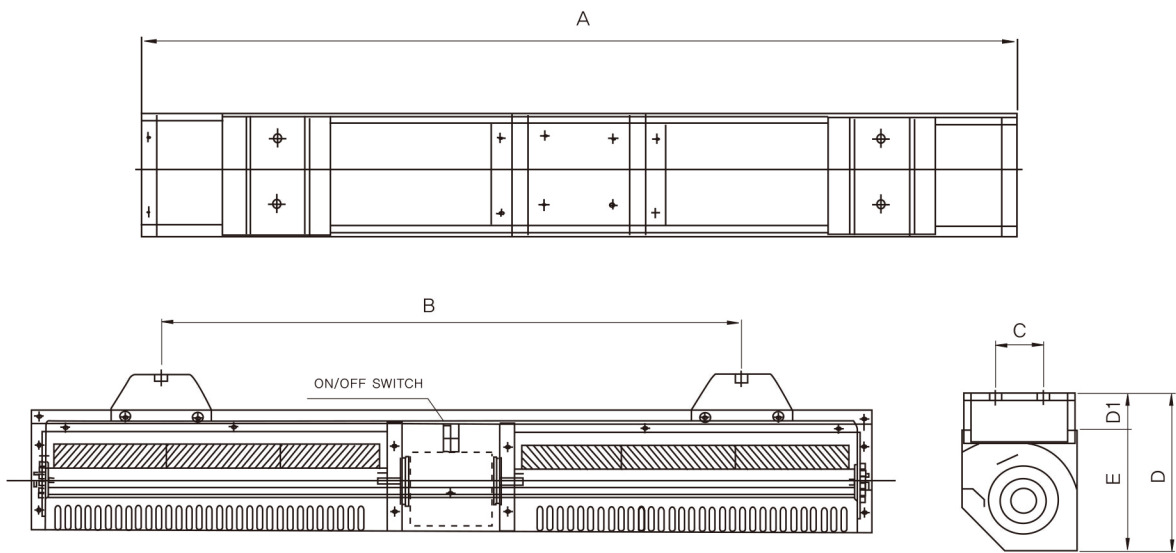

# LONG FAN SYSTEM

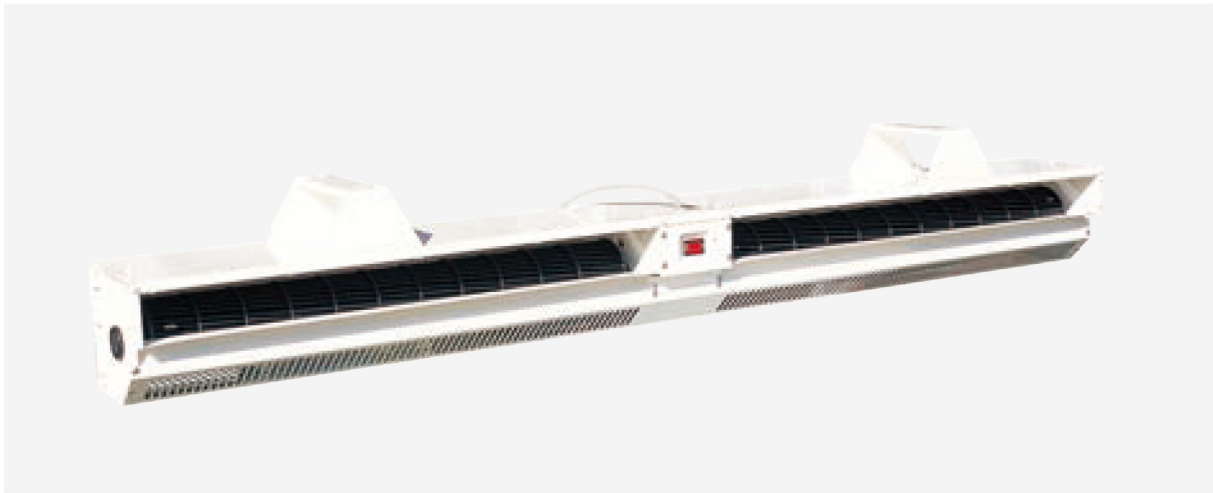

MODEL	전원(V/PH/Hz)	소비전력(W)	풍량(CMH)	정압(mmAq)	무게(kg)	소음dB(A)	회전수(RPM)
HI-30L	220 / 1 / 60	65	1200	2.5	10	59	1761
HI-35L	220 / 1 / 60	132	1800	2.5	15	60	1761
HI-40L	220 / 1 / 60	168	2400	2.5	18	62	1771
HI-45L	220 / 1 / 60	200	3000	2.5	18	62	1781


※ NOTE : BL-BLDC모터, O-외륜구동형 모터

MODEL	DIMENSIONS						
	A	B	C	C1	D	D1	L
HI-30L	950	345	120	165	225	75	150
HI-35L	1140	625	120	165	225	75	150
HI-40L	1500	925	120	165	225	75	150
HI-45L	1500	1150	120	165	225	75	150

※ 제품의 성능향상을 위해 규격은 사전 예고없이 다소 변경될 수 있습니다.



# SINGLE FAN SYSTEM

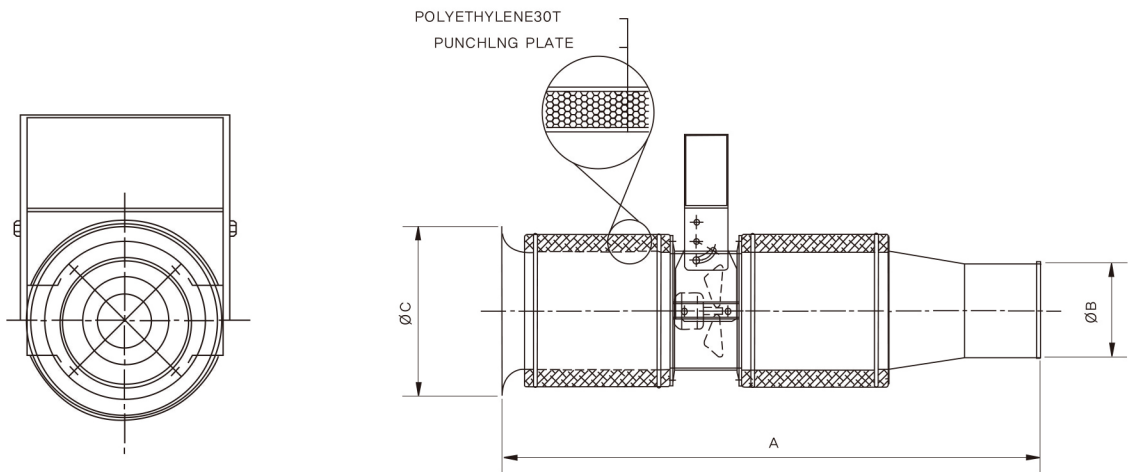

MODEL	DIMENSIONS		
	A	B	C
HI-30C(A)	960	180	270
HI-30C(S)	960	170	280
HI-40C(A)	1160	190	320
HI-40C(S)	1160	190	320
HI-58C	1340	280	400
HI-75C	1340	290	400
HI-90C	1350	290	400
HI-105C	1350	400	450

MODEL	전원(V/PH/Hz)	소비전력(W)	풍량(CMH)	정압(mmAq)	무게(kg)	소음dB(A)	회전수(RPM)
HI-30C(A)	220 / 1 / 60	213	1860	2.3	15	62	3325
HI-30C(S)	220 / 1 / 60	213	1860	2.3	10	62	3325
HI-40C(A)	220 / 1 / 60	264	2520	3.2	15	62	2965
HI-40C(S)	220 / 1 / 60	264	2520	3.2	13	62	2965
HI-58C	220 / 1 / 60	290	3500	5	25	63	1730
HI-75C	220 / 1 / 60	300	4500	5	30	64	1740
HI-90C	220 / 1 / 60	550	5400	5	45	65	1740
HI-105C	380 / 3 / 60	750	8000	5	62	65	1750

※ 제품의 성능향상을 위해 규격은 사전 예고없이 다소 변경될 수 있습니다.