




# WALL VENTILATOR

## Wall Ventilator (P.V.C)



- ❖ EKS-200, 250, 300SAP
❖ EKS-206, 256, 306AG
❖ EK-160NST
❖ DSC-EF300



MODEL	풍량 (m³/min)	소비전력 (W)	날개직경 (mm)	설치규격 (WxH)mm	비고
EKS-200SAP	8	37	200	250x250	셔터-그릴형
EKS-250SAP	12	44	250	300x300	셔터-그릴형
EKS-300SAP	17	45	300	350x350	셔터-그릴형
EKS-206AG	8	37	200	250x250	자동-개폐형
EKS-256AG	12	38	250	300x300	자동-개폐형
EKS-306AG	17	39	300	350x350	자동-개폐형
EK-160NST	3.5	30	150	250x250	천정형
DSC-EF300	1.5	14	100	135x135	욕실형

## Wall Ventilator (STEEL)

- ❖ HIWF-35S, 40S, 45S
❖ HIWF-45S, 50S(유압형)
❖ 셔터(Shutter)

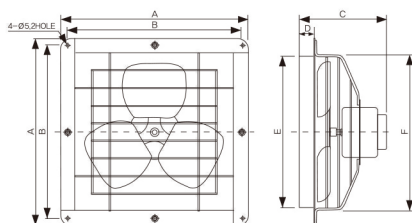

MODEL	풍량 (m³/min)	소비전력 (W)	날개직경 (mm)	설치규격 (WxH)mm	A	B	C	D	E	F
HIWF-35S	35	100	350	395x395	444	413	206	29	379	Ø393
HIWF-40S	50	115	400	445x445	490	459	222	29	425	Ø493
HIWF-45S	75	220	450	495x495	545	514	260	29	482	Ø494
HIWF-45S(유압형)	125	350(1Ø)	450	520x520	620	560	330	-	510	Ø463
HIWF-45S(유압형)	125	350(3Ø)	450	520x520	620	560	330	-	510	Ø463
HIWF-50S(유압형)	135	600(1Ø)	500	520x520	620	560	330	-	510	Ø513
HIWF-50S(유압형)	135	600(3Ø)	500	520x520	620	560	330	-	510	Ø513